


### Accessories to be used for reinforcement when tanking with Alfix Sealing membrane

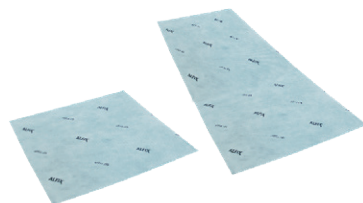

#### Alfix Drain mat

Self-adhesive mat based on synthetic rubber

For waterproof sealing around floor drains incorporating gully flange. Adheres to plastic, metal, and concrete.


Apply after priming with Alfix Primer

Dimensions:

Standard: 33 x 32 cm

Type H: 40 x 40 cm

Type L: 30 x 120 cm



#### Alfix Seal-Mat 40x40 cm, drainmat **SLIMLINE**

Diffusion-proof drain mat of laminated PE foil and self-adhesive synthetic rubber.

For waterproof sealing around floor drains incorporating gully flange.

Adheres to plastic, metal, and concrete.

Apply after priming of surfaces with Alfix Sealing Primer or Alfix PlaneMixPrimer.

Size 40 x 40 cm, thickness: 1 mm



#### Alfix Seal-Strip,

Self-adhesive tape based on synthetic rubber

For elastic and waterproof sealing around pipe penetrations, sanitary installations, and in junctions where different building materials meet, e.g. where wall abuts floor.

Apply after priming with Alfix Primer

Length: 10 m or 20 m. Width: 10 cm.

|                                                                                             |                                                                                                                        |                                                                                                                |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <br>1073 | Alfix A/S<br>H.C. Ørstedes Vej 11-13<br>DK-6000 Kolding<br>alfix.com<br><br>10<br><br>1073-CPR-314-1<br>1073-CPR-314-2 | Alfix Seal-Strip<br><br>ETA-09/0047<br>ETA-09/0048<br><br>ETAG 022<br><br>Declaration of performance<br>No. 20 |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|



#### Alfix Reinforcing strip

Polypropylene strip

For bridging over cracks and for reinforcing jointing surfaces on walls. Apply Reinforcing strip by bedding in a coat of wet sealing membrane, use Alfix 1K Sealing Membrane or Alfix 2K Sealing Membrane

Length: 10 m, 25 m, or 100 m. Width: 10 cm.



#### Alfix Sealing strip

Rubberreinforced polyester strip.

For effective, elastic and waterproof sealing around pipe penetrations, sanitary installations, and for junctions between adjoining walls and floors.

Apply Sealing strip by bedding in a coat of wet sealing membrane, use Alfix 1K Sealing Membrane or Alfix 2K Sealing Membrane

Length: 10 m. Width: 12 cm.



## **Alfix Polyester matting**

Polyester fil.

For reinforcement of Alfix Sealing Membrane, Alfix 1K Sealing Membrane or Alfix 2K Sealing Membrane. Recommended for use on critical, demanding, and heavy duty areas. Apply Polyester matting in a thin coat of wet sealing membrane and smoothing to avoid folds or wrinkles. Ensure overlap of approx. 10 cm between the lengths. Proceed immediately upon bedding the fil with a new coat of Sealing membrane which should be applied to full coverage over the entire area.

Length: 10 or 50 m. Width: 100 cm.

## **Technical enquiries**

Wet rooms – Tanking with Alfix

Produktinfo on:

- Alfix Primer
- Alfix 1K Sealing membrane
- Alfix 2K Sealing membrane

For further information, please consult our Technical Services Dept.

For latest update of this product info, visit [www.alfix.com](http://www.alfix.com)